

Translated version of ROCK X800 升级教程.doc


1.1. Open "Upgrade Tool V1.5"




Double click to open

1.2. Installing the drivers

Before upgrading the firmware, turn off the Tablet PC. Push the upgrade button and hold (the upgrade buttons: + key), while the device is connected to a PC USB port. If you have not installed device drivers, it will pop up the following prompt:

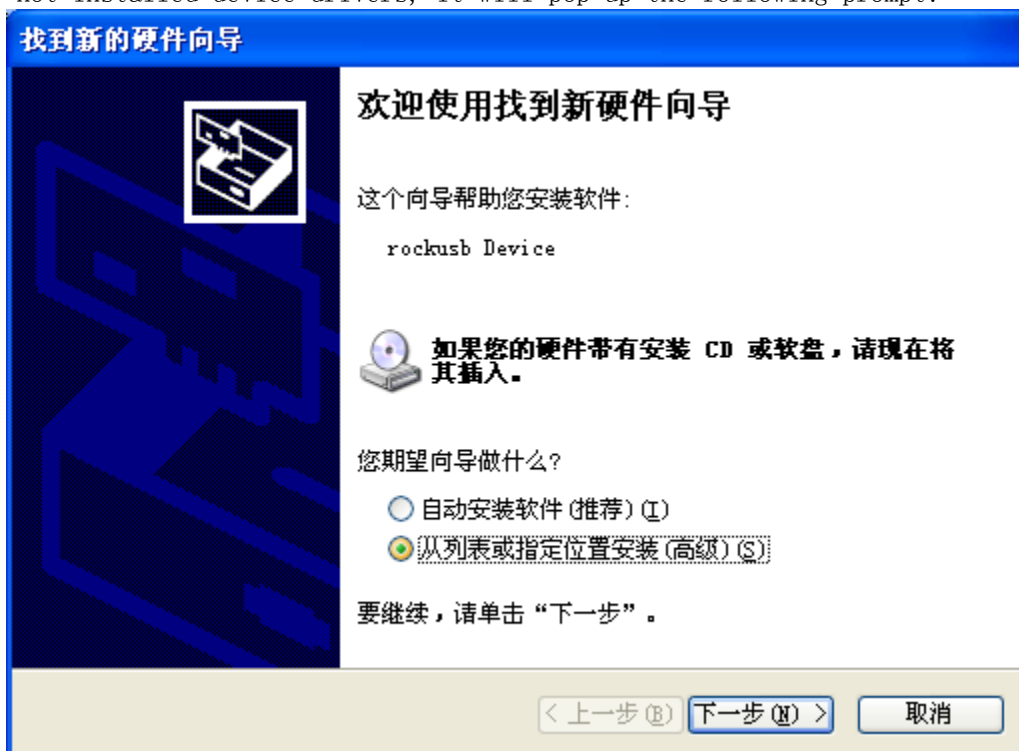

Select "install from a list or specific location (Advanced)" and click Next.

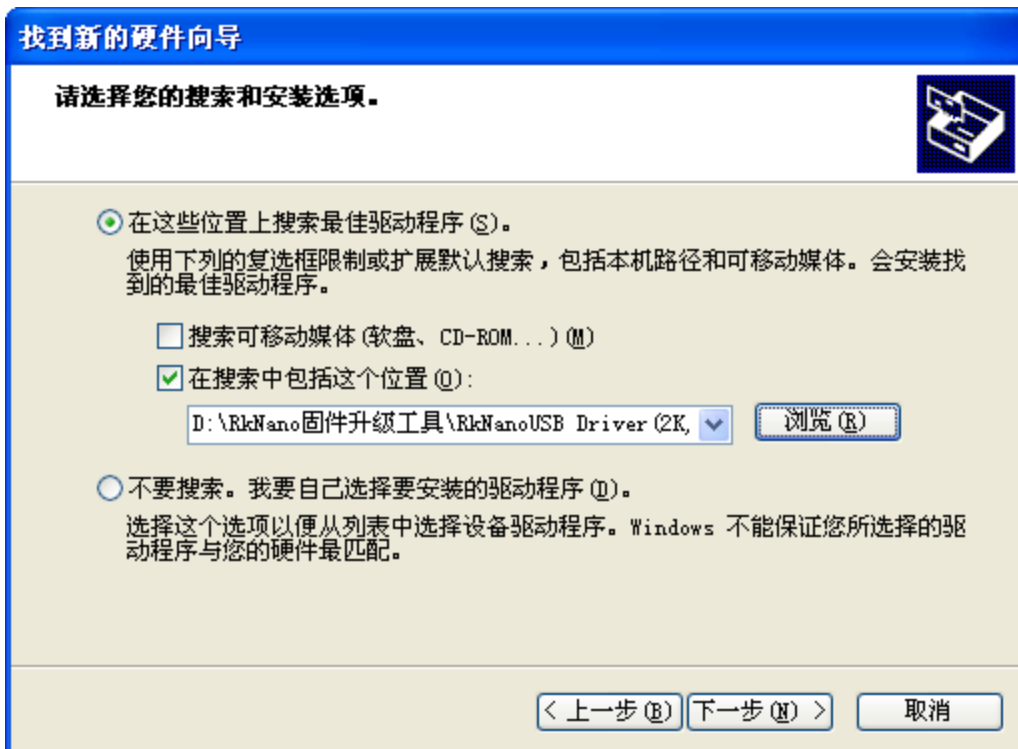

Select the rockusb.sys driver folder under the






This completes the USB device driver installation.

1.3. Firmware volume upgrade

1.3.1. Interface Introduction

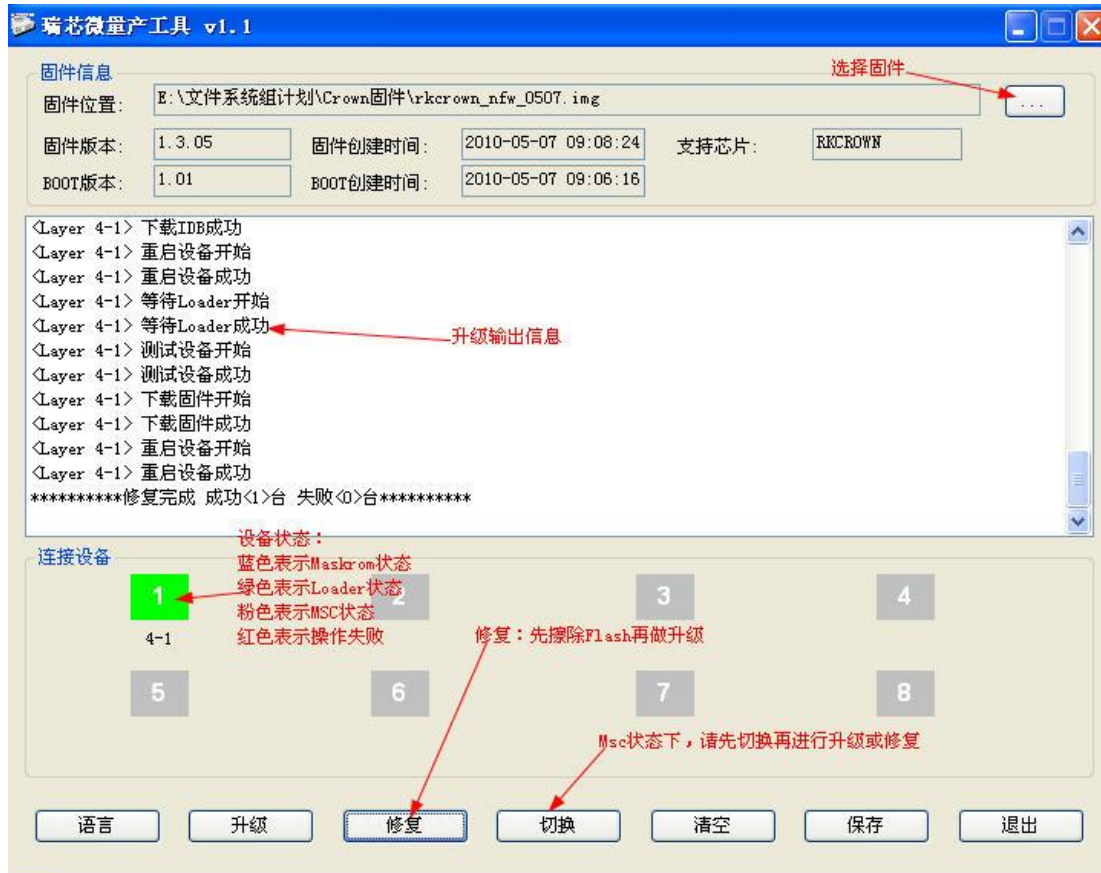

1.3.2. Upgrade steps

- Plug the device
- Select the firmware
- The to confirm equipment enter Rockusb state (Maskrom Loader state belong to the state of Rockusb)
- Upgrade or repair equipment

1.3.3. Error Messages Explained

- "Failed to load configuration information, and can not operate, due Config.ini file loaded error from publishing program to obtain correct Config.ini file replace
- "Failed to load firmware, can not operate!" Caused no choice due to a firmware or the firmware can not be read correctly, make sure that the firmware is correct
- "The other operation is running, please wait!" Please wait for the end of the other operations due to the ongoing operation,
- "Device not found, unable to operate!" Make sure the device is connected,, or whether Rockusb state
- "Failed to create operational processes, and can not operate." Please restart the program, and then operate
- "Object create operation failed, unable to operate!" Please restart the program again when the line operating
- "Does not support this type of equipment can not operate!" Please confirm whether the device into the Rock usb state if the current state of the U disk, and then operate the first switch

2. Precautions

- Bulk upgrade the best multiple devices connected to the same HUB, at the same time upgrade the equipment does not recommend more than four units.
- After modifying the configuration file, you need to re-run production tools
- Production tools, do not open other upgrades
- Production tools in the production process to the device automatically generates a UID unique code, if you need to make sure that this unique code reliable computer equipped with a network card to use production tools.
- When the firmware in Boot version updates, it is recommended to use the repair function to do the upgrade.